

- LAND
- ↓ DOWNHOLE
- ~ SEABED
- ≡ MARINE



# MATS 3G

Multi-modulation Acoustic Telemetry System



Ahead of the Curve<sup>SM</sup>

# MATS 3G

---



## // NEW GENERATION ACOUSTIC TELEMETRY SYSTEM

**M**ATS 3G is an underwater acoustic modem that offers a single solution for all underwater communication needs.

Its state-of-the-art DSP (Digital Signal Processing) technology ensures long-range and reliable communication. MATS 3G also features a robust and versatile innovative multi-modulation system to fit a wide range of applications and environments.

The last generation acoustic modem supports multi-sensor and high-data-rate antenna receivers for improved communication in shallow or noisy environment. Acoustic modems can ensure stealth communication when necessary.



# Features & Benefits

## // OUTSTANDING TRANSMISSION PERFORMANCE

Up to 15-km range  
Up to 24.6-kbps data rate


## // OPTIMIZED INTEGRATION

Light and compact design

## // VERSATILE FIELDS OF APPLICATION

Oceanography  
Offshore Oil & Gas  
Defense

+ + + +  
+ +  
+ + + + +  
+ + + +  
+ + + +  
+

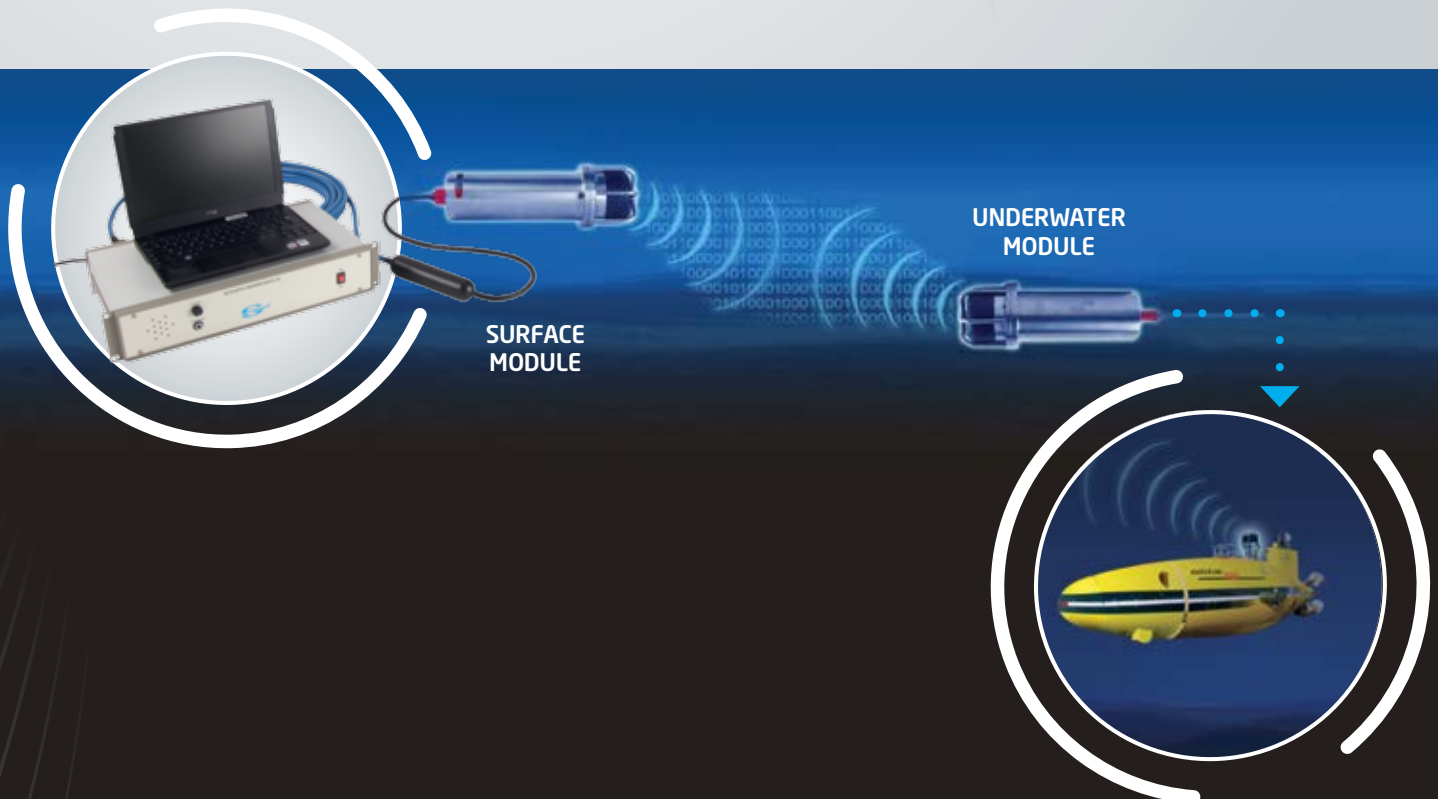

# Applications


## // AUV COMMUNICATION

MATS 3G is ideal for AUV (Autonomous Underwater Vehicle) communication. As well as being compact and light, it has a high-data-rate link which can be used to transfer images from a subsea camera or side-scan sonar data to a master vessel at the surface.




## // ROBUST CONTROL COMMAND

MATS 3G ensures reliable, robust and secure communication in harsh acoustic conditions. When deployed in an offshore drilling platform environment, it provides an error-free underwater communication solution to command subsea valve operations.

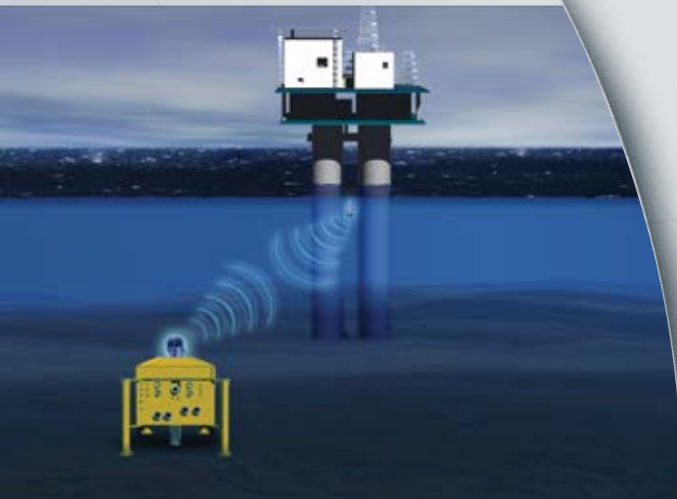

## // UNDERWATER MONITORING

MATS 3G can be deployed for long periods of time for underwater field monitoring. Its use can range from oceanographic applications to real-time monitoring by networked stations across vast instrumented fields.

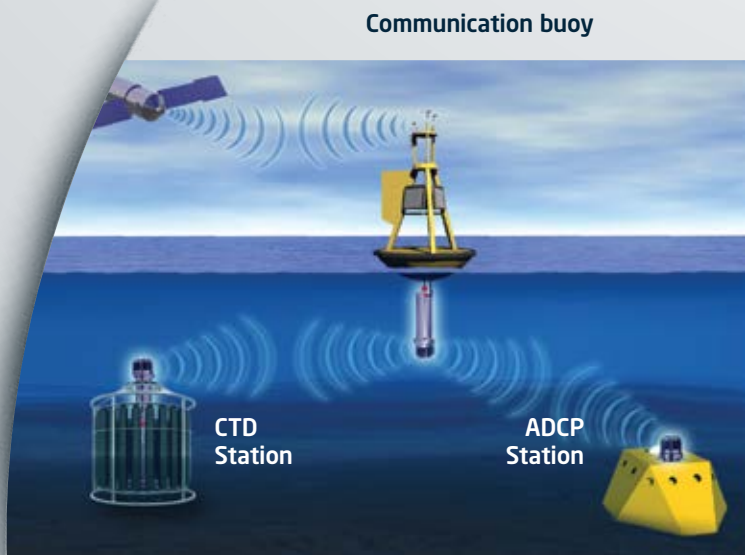




# Equipment

## // SURFACE MODULE

Hooked to a vessel or to a buoy, and placed close to the sea surface, the MATS 3G surface module communicates with all the other MATS 3G modules using the same frequency. A 30-m long cable is provided between the rack and the modem. Other lengths are available on request.



## // UNDERWATER MODULE


With the capability to be installed on any underwater system (AUV, CTD, ADCP, etc.) and down to depths of 6,000m, the MATS 3G underwater module communicates with all the other MATS 3G modules using the same frequency. Its light and compact design facilitates integration and it is made of titanium for optimum durability. A flange is provided for the installation.



## // UNDERWATER OEM MODULE

Integrated on the watertight hull of any underwater system the compact OEM module communicates with all the other MATS 3G modules using the same frequency.

In 12-kHz version

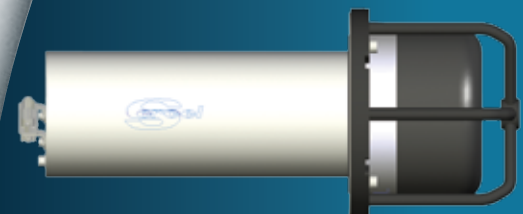

# Options

## // ACOUSTIC BAFFLE

### IMPROVED COMMUNICATION IN HARSH ENVIRONMENTS

Installed as an option on the sea surface or on the underwater module, the baffle channels the emitted signal. Available in either a 110° or 180° format, the baffle focuses the emitted signal in a narrower direction.

#### 180° Baffle

Transmission gain: 3dB  
Ship noise reduction: 10dB

#### 110° Baffle

Transmission gain: 6dB  
Ship noise reduction: 15dB



Baffle



Without  
baffle


With 180°  
baffle

With 110°  
baffle

## // TRIDENT

### IMPROVED ACOUSTIC SIGNAL IN HORIZONTAL CHANNELS

Trident is a string of four hydrophones which improves the high-data-rate communication in horizontal channels (shallow water) and noisy environments. Trident manages the processing of multipath spreading for an improved signal-to-noise ratio. Signal-to-noise improvement: 6dB

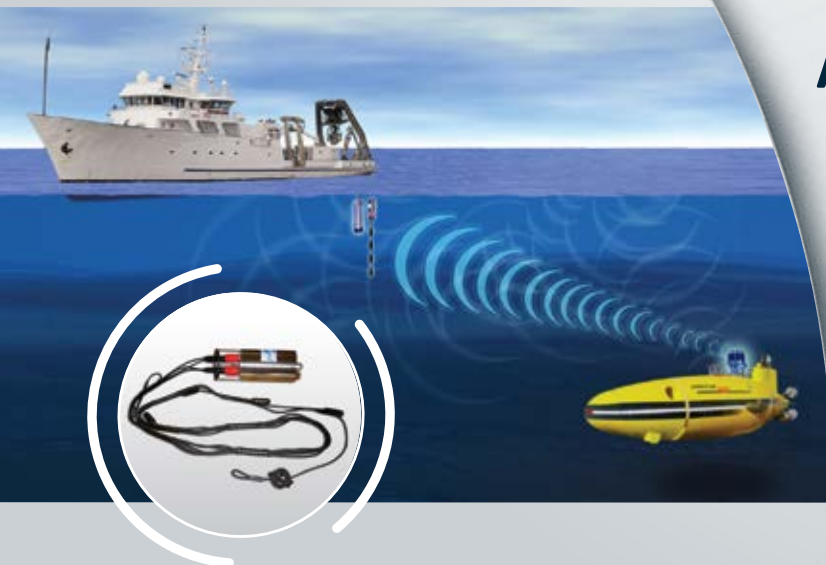

## // VITAC

### IMPROVED IMAGE TRANSMISSION

VITAC is a software module which improves and facilitates image transmission. Even if transmission errors occur, VITAC ensures that transmitted images can still be visualized. Typical compression rate: 20 (24-bit image)







# MATS 3G

Multi-modulation Acoustic Telemetry System

## **Sercel - France**

16 rue de Bel Air  
B.P. 30439 - 44474 CARQUEFOU Cedex  
Téléphone: (33) 2 40 30 11 81  
Fax: (33) 2 40 30 19 48  
E-mail: [sales.nantes@sercel.com](mailto:sales.nantes@sercel.com)  
SAS au capital de 2 000 000 €  
Siège Social: 16 rue de Bel Air - 44470 CARQUEFOU  
378.040.497 R.C.S. Nantes Code APE 2651B

## **Sercel Inc. - U.S.A.**

17200 Park Row  
Houston, Texas 77084  
Telephone: (1) 281 492 6688  
Fax: (1) 281 579 7505  
E-mail: [sales.houston@sercel.com](mailto:sales.houston@sercel.com)

[www.sercel.com](http://www.sercel.com)

© Sercel 07/18



Ahead of the Curve<sup>SM</sup>